


Wine Pump Range

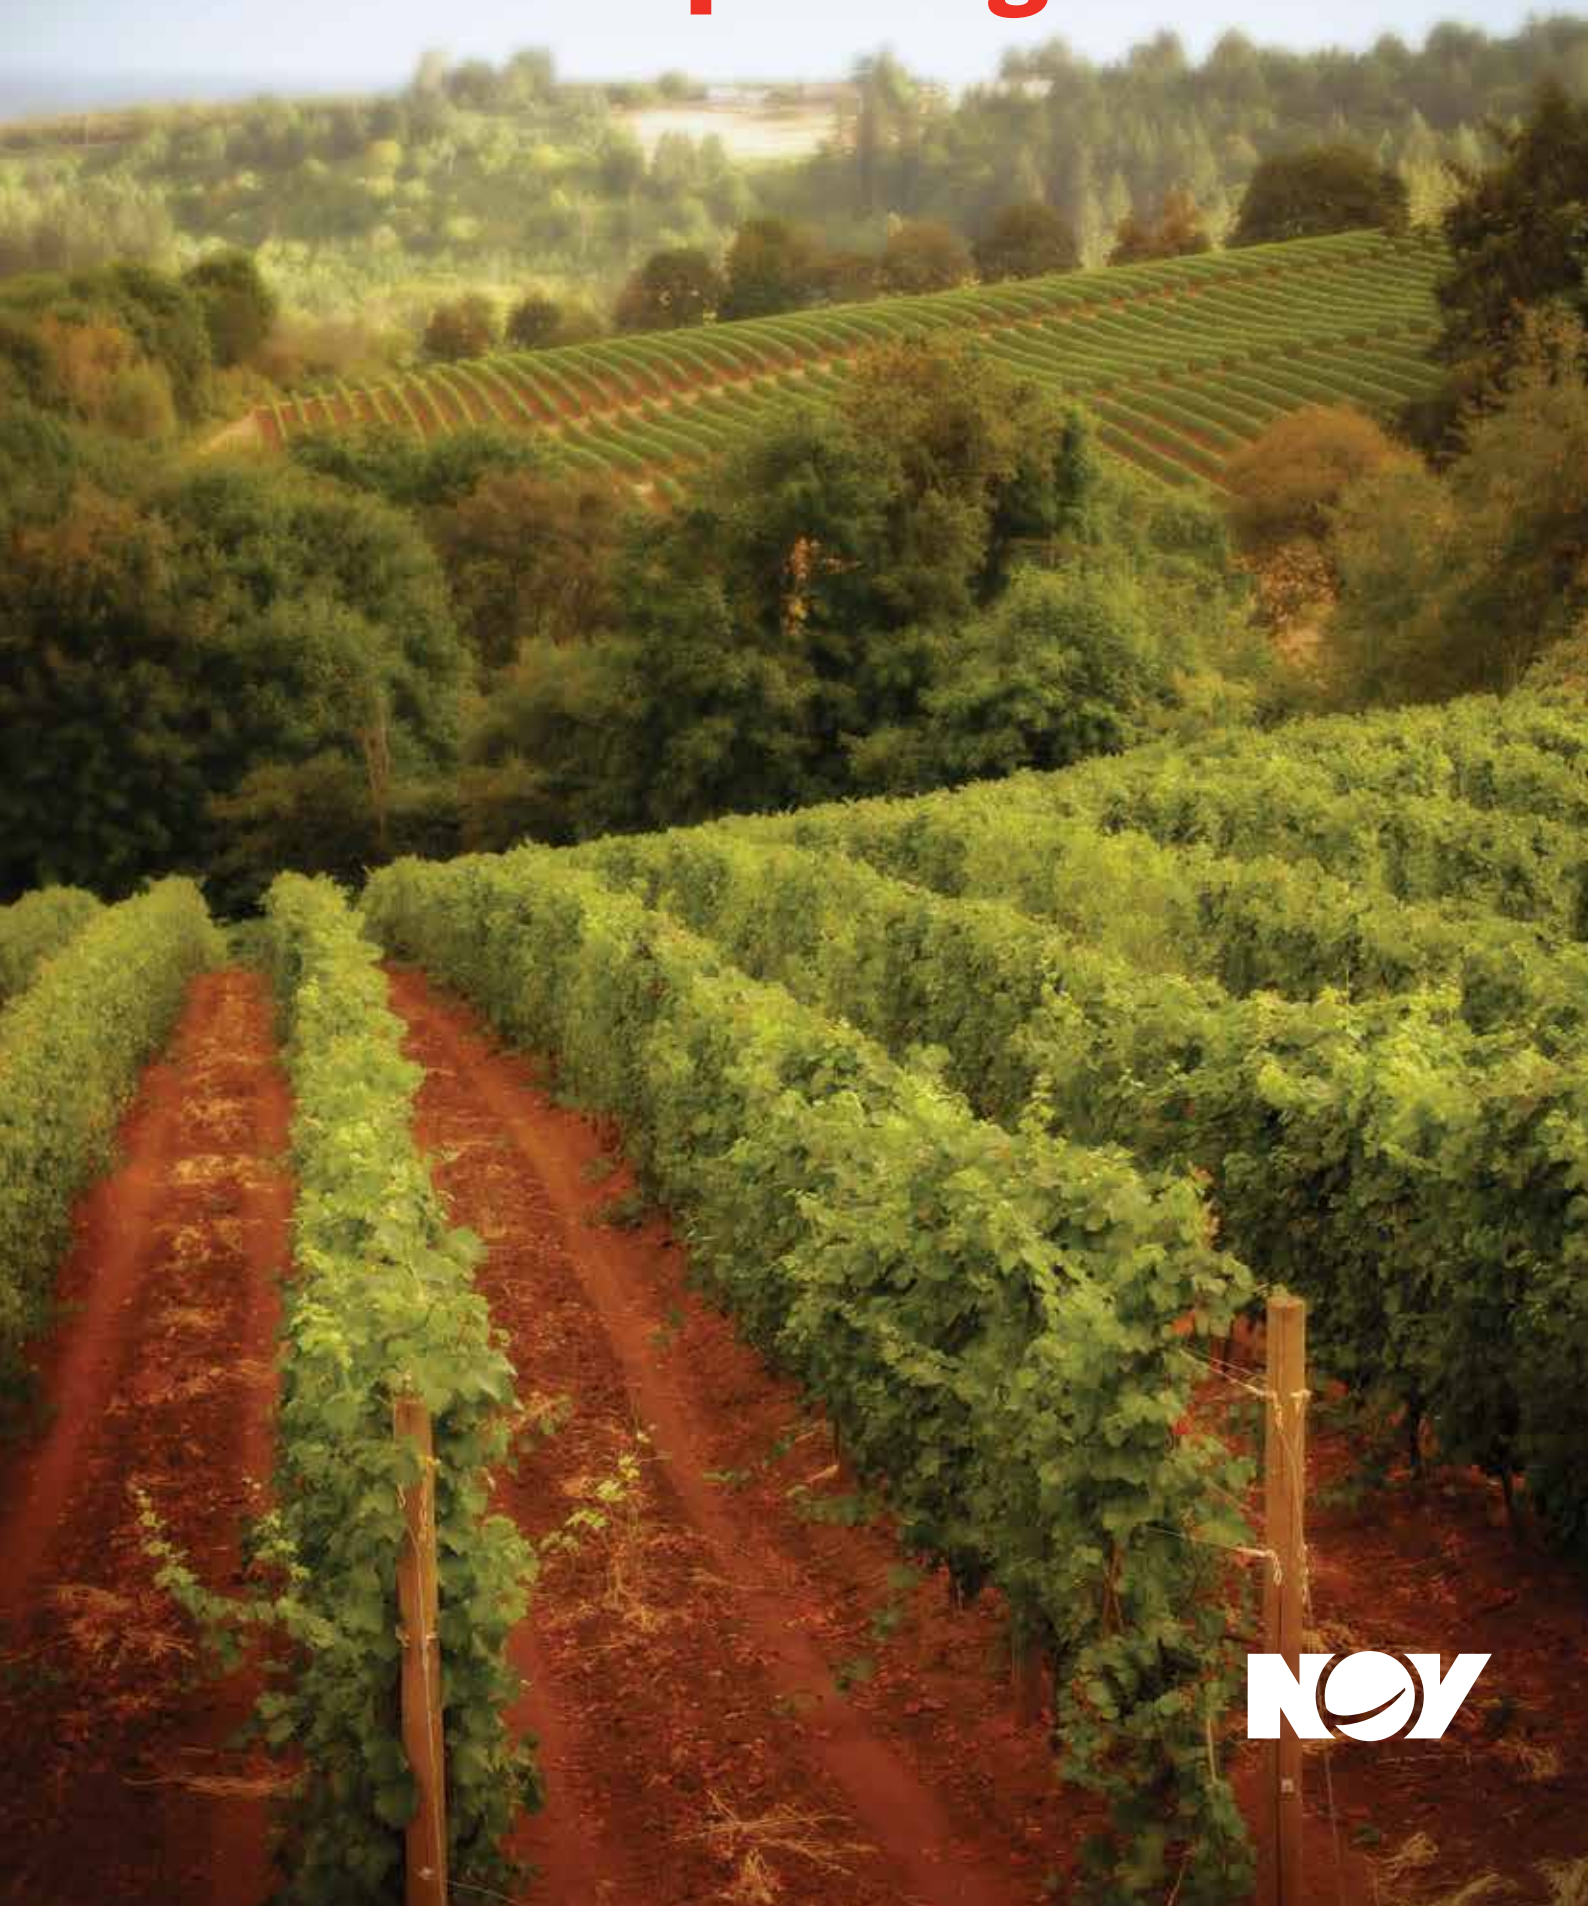

NOV is a leading name in the design, manufacture and supply of progressive cavity pumps, aftermarket components, grinders, screens and packaged fluid transfer solutions, worldwide. We have an extensive global distribution network,

with over 70 years experience. Our expertise extends to supplying customers with products and services that satisfy the demands of such industries as water & waste water, mining, oil & gas, pulp & paper, food & beverage.

MONO Wine Pump Applications

Pump Type:	SB061HC1R8/C87S
Product:	Wine / Juice
Capacity:	up to 30,000 l/hr
Pressure:	up to 4 bar
Drive:	Danfoss FCM 5.5kW
Pump Type:	Widethroat SW071
Product:	Drained must
Capacity:	up to 20 ton/hr
Pressure:	6 bar
Drive:	11.0kW geared motor



Why Choose a MONO™ Pump for your Winery?

MONO™ pump solutions have led the way in the Australian Wine Industry with innovative and efficient pumping solutions. With over 40 years of providing support to the industry, MONO pumps are found from the first crush of the berries to the final bottle filling. Our pumps success and reliability for even the most arduous duties has made us the number one choice for wine pumps in Australia. Our experienced advice, product quality, aftermarket support and service are all part of our ongoing commitment to the Australian Wine Industry.



MONO B Range Winery Pump Mobile Package

- Gentle low shear pumping action
- Solids handling ability
- Abrasion resistant
- Long life with reliability
- Adjustable flow rate with variable speed drive
- High flow from small pumps
- Self-priming with high suction lifts
- Compact lightweight pumps mounted on purpose-designed trolleys for manoeuvrability
- Quick-connect RJT/BSM port fittings standard. Wine thread optional
- Mechanical seal to eliminate leakage and reduce maintenance
- Chambers in stainless steel with smooth surface finish for quick, effective cleaning
- Bi-directional
- Flows to 40 m3/hr
- Option: Auger on coupling rod for solids handling



MONO W Range Crusher Pump


- Positive displacement, flow proportional to speed, flow independent of pressure
- Handles most liquids from grape must to viscous fluids
- Low emulsification, low shear, negligible pulsation
- 316 stainless steel wetted parts
- Simple construction for ease of maintenance
- Flows to 150 tons or m³/hr
- Pressures to 48 bar
- Mobile drained must pumps

Packo Wine Turn Over Pump

- Large clearances for improved solids handling capabilities
- Either semi-open vortex or open impellers are available
- Flows up to 180m³/hr
- Heads up to 20m
- All 316 stainless steel wetted parts
- Proven technology
- Ideally suited for use on fermentation tanks / irrigator systems

Luna Range - Pump Range

- Hygienic design
- AISI 316 stainless steel
- Welded ports
- Tri-lobe, bi-lobe or dual w
- Flows up to 300 m³/hr
- Heads up to 20 bar
- Temperature range from

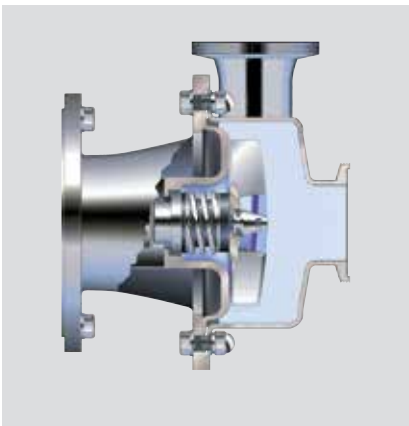



Rotary Lobe MONO CP Cellar Pump

- Gentle low shear pumping action
- Abrasion resistant
- Long life with reliability
- Adjustable flow rate with variable speed drive
- High flow from small pumps
- Self-priming with high suction lifts
- Thread BSP port connection. (BSM & wine fit tings)
- Mechanical seal to eliminate leadkage and reduce maintenance
- Flows to 125lpm

ing rotary piston


-40deg C to +200deg C




Packo Stainless Steel Centrifugal Wine Transfer Pump

- Pressures to 28m head
- Standard trolley design, stainless steel polished or painted mild steel
- High volume transfer pumps
- Packaged units including DOL/VSD starters and cables
- Open impeller
- One size standard DIN24960 mechanical seal Crane Type T521. Carbon/S. Carbide/EPDM rubber bellows type.
- Wetted components, 316 stainless steel, electrolytically polished
- One piece impeller and shaft
- RJT connections, other options available upon request
- Flow 300 m³/hr
- Heads up to 120m
- Self-priming option available

WHITE WINE PROCESS

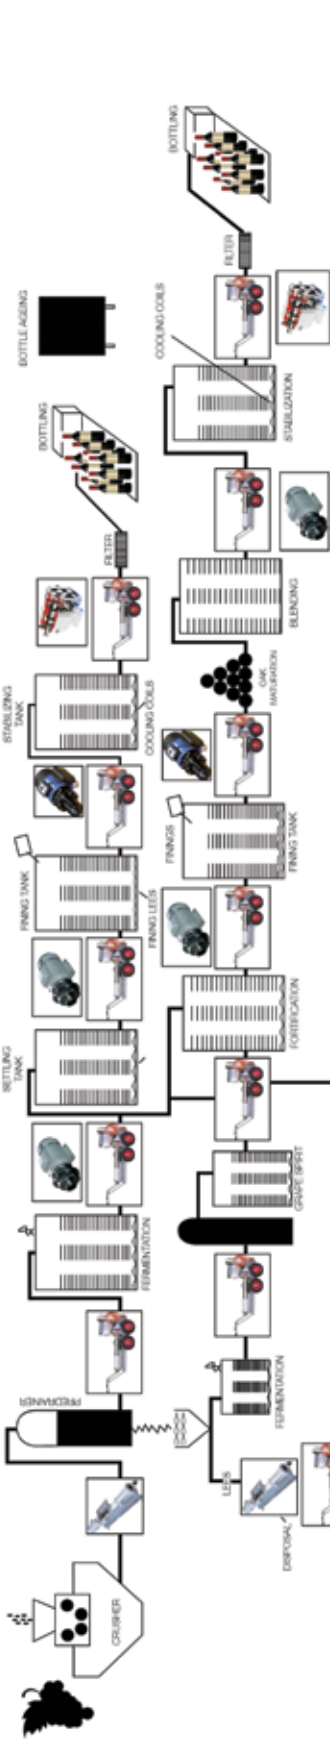

RED WINE PROCESS

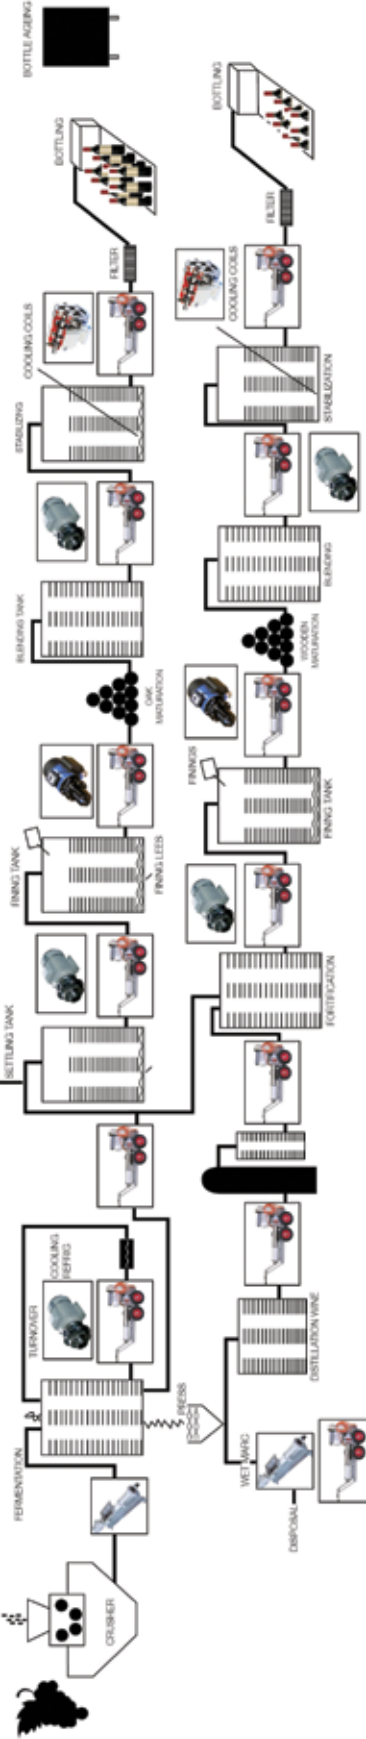

LEGEND: WINERY PUMP

	W RANGE
	CP RANGE
	PACKO
	LUNA



National Oilwell Varco has produced this brochure for general information only, and it is not intended for design purposes. Although every effort has been made to maintain the accuracy and reliability of its contents, National Oilwell Varco in no way assumes responsibility for liability for any loss, damage or injury resulting from the use of information and data herein. All applications for the material described are at the user's risk and are the user's responsibility.

Corporate Headquarters

7909 Parkwood Circle Drive
Houston, Texas 77036
USA

NOV

75 Frankston Gardens Drive
Carrum Downs Vic 3201
Australia

Phone: 1800 333 138

